




**DIVISION OF  
FIRE PREVENTION  
& INVESTIGATION**

**FLAME-LIGHTED DEVICE**

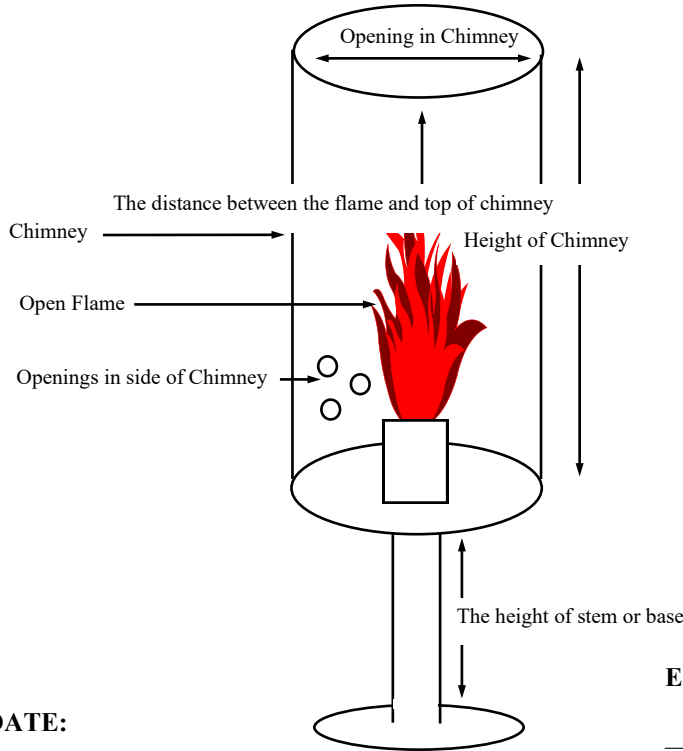

**COMPANY INFORMATION**

---



---



---



---


**APPROVAL DATE:**  
\_\_\_\_\_

**EXPIRATION DATE:**  
\_\_\_\_\_

**APPROVED FOR USE WITHIN PUBLIC ASSEMBLIES IN THE CITY & COUNTY OF SAN FRANCISCO AT:**  
\_\_\_\_\_

<b>DESCRIPTION OF DEVICE:</b>			
Minimum Height of Chimney		Openings in sides of Chimney	
Maximum Width of the Opening on Top of Chimney		Minimum distance of flame to top of Chimney	
Fuel: Combustible Liquid or Candle		Height of Stem or Base	
<b>CONDITIONS OR RESTRICTIONS: APPROVED CANDLES SHALL BE USED ON TABLES AND KIOSKS ONLY. SHALL HAVE MINIMUM SIZE 2A:10BC FIRE EXTINGUISHER ON SITE.</b>			

**FLAME-LIGHTED CANDLES AND OPEN FLAME DECORATIVE LIGHTING  
(Illustrative purpose only; see requirements below.)**

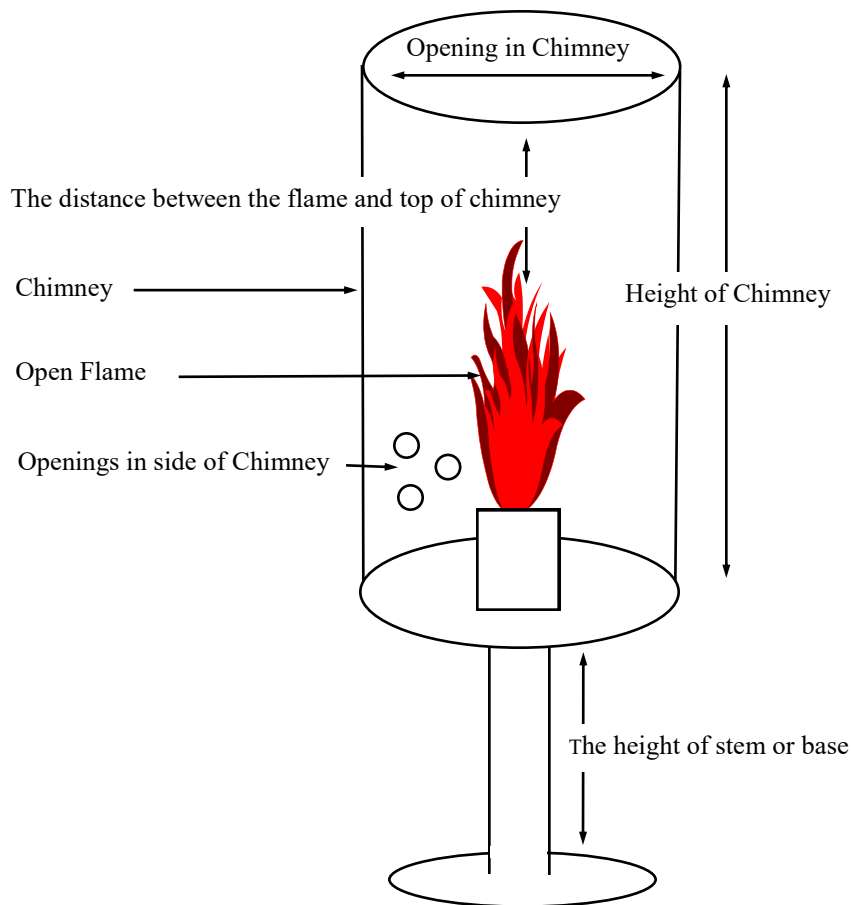

*The use of open-flame candles and open flame lighting in public assembly occupancies shall comply with the following requirements as outlined in Sections 105.6.32 and 308.3.1 of the 2019 San Francisco Fire Code:*

1. Class I and II liquids and liquefied petroleum gases (propane or butane) shall not be used as fuels.
2. The flame shall be enclosed in a non-combustible chimney. The candle or device may set in the chimney or the chimney may be securely attached to the device.
3. The distance between the openings on top of the chimney and the top of flame shall be such that a single layer of tissue paper placed on the top of the chimney will not ignite in 10 seconds.
4. Openings on the sides of the chimney shall not be more than 3/8 inch in diameter.
5. The candle holder or chimney shall be designed so that it will not be easily tilted or knocked over.
6. Liquid- or solid-fueled lighting devices containing more than 8 ounces must be self-extinguishing and not leak more than one-fourth teaspoon per minute if tipped over.
7. The device or holder shall be constructed to prevent the spilling of liquid fuel or wax at the rate of more than one-fourth teaspoon per minute when the device or holder is in any other than the upright position.
8. Shades, if used, shall be made of noncombustible materials and securely attached to the open-flame device holder of chimney.
9. Candelabras with flame-lighted candles shall be securely fastened in place to prevent overturning and located away from occupants using the area and away from possible contact with drapes, curtains or other combustibles.